


DOMINO-350MA-DR-DIM - Dimmable LED Driver



Dimensions

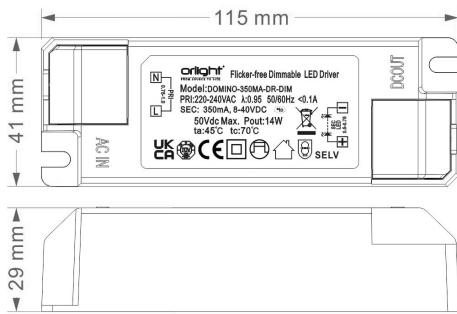

Description

DOMINO-350MA-DR-DIM is a constant current LED driver dimmable via leading edge and trailing edge phase dimmers with short-circuit protection and self-recovery function.

Specification

| | |
|---|--|
| Mains dimming | Leading & Trailing edge phase dimmers |
| Rated Supply Voltage | 220 - 240V |
| Input Voltage AC | 185 - 264V |
| Mains Frequency | 47 - 63Hz |
| Max. Power | 14W |
| Power Factor [@230V, 50Hz full load] | 0.9 |
| Typ. Efficiency [@230V, 50Hz full load] | 74% |
| THD [@230V, 50Hz full load] | <15% |
| Starting time | <0.55s @ 230V |
| Leakage current | <2mA |
| Output current [fixed] | 350mA |
| Min / Max forward voltage, DC | 8 - 40V |
| Type of protection | IP20 |
| Operating temperature | -25 °C to +45 °C |
| Storage temperature & humidity | -40 °C to +80 °C 10% RH no condensation |
| Lifetime | >50,000 hrs |
| Guarantee | 2 years |
| Dimensions L x W x H | 115mm x 41mm x 29mm |
| Net weight | 68g |
| Standards | IEC 61347-2-13:2014, AMD1:2016 used in conjunction with IEC 61347-1:2015, AMD1:2017. |
| | IEC 60598-2-1:2020 used in conjunction with IEC 60598-1:2020. |
| | IEC 62493 [ED2] |
| | EN61000-4-2,3,4,5,6,8,11; EN61547 |
| Test procedure | TUV mark, E-LVD & UKCA |

Product Coding Example: DOMINO-350MA-DR-DIM

CODE

DOMINO-350MA-DR-DIM