





FIRE HOOD - SINGLE

Description

Firehood may be easily installed from below or above the ceiling. With cable entries on side, the intumescent covers are ventilated to avoid light fittings overheating. Cables can also be passed under the rim of the cover for connections to transformers or drivers. Only the light fitting penetration is required to be protected, not the transformer. Tested to BS476 Part 23. Fire-rated to 60 Mins.

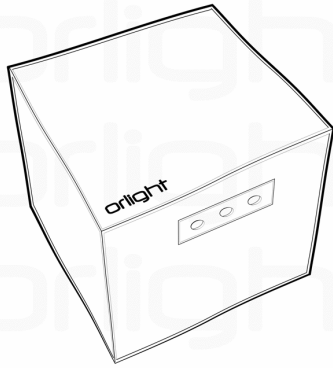

Dimensions

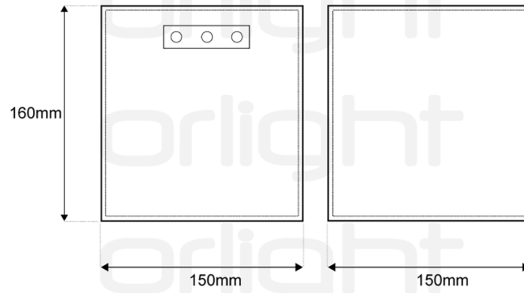

Specification

Main Housing Material	Heavy duty braided cloth
Features	Robust, Self-Supporting, Fire retardant
Cable Vent	Intumescent cable entry patch
Acoustic Rating	Rated BS EN 150 140: BS EN ISO 717
Fire Rating	60 minutes Hood rated to BS EN 1365-2:2000 / BS476 Part 23:1987
Finish	White / Braided cloth impregnated with fire resistant coating
IP Rating	IP20
Height (mm)	150 mm
Length (mm)	150 mm
Width/Depth (mm)	150 mm