
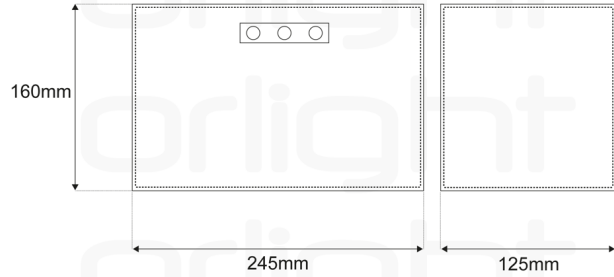


**FIRE HOOD - TWIN**

**Description**

Fire hood may be easily installed from below or above the ceiling. With cable entries on side, the intumescent covers are ventilated to avoid light fittings overheating. Cables can also be passed under the rim of the cover for connections to transformers or drivers. Only the light fitting penetration is required to be protected, not the transformer. Tested to BS476 Part 23. Fire-rated to 60 Mins.

**Dimensions**



**Specification**

<b>Main Housing Material</b>	Heavy duty braided cloth
<b>Features</b>	Robust, Self-Supporting, Fire retardant
<b>Cable Vent</b>	Intumescent cable entry patch
<b>Acoustic Rating</b>	Rated BS EN 150 140: BS EN ISO 717
<b>Fire Rating</b>	60 minutes
<b>Finish</b>	White / Braided cloth impregnated with fire resistant coating
<b>IP Rating</b>	IP20
<b>Height (mm)</b>	160 mm
<b>Length (mm)</b>	250 mm
<b>Width/Depth (mm)</b>	125 mm