


MAGNO-TILT-F - Fire Rated Downlight



Description

Adjustable architectural downlight featuring a magnetic lamp change mechanism. The fire rated range, with its long base features an integrated lamp holder, can accommodate longer length LED lamp types. **Images shown are for visual reference. Light source not included.**

Dimensions

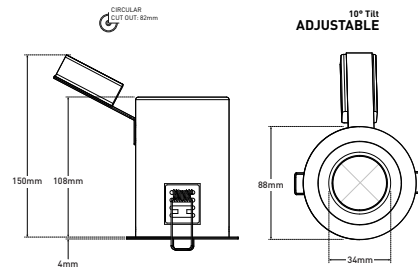

Specification

Suggested Light Source	DYNA, DYNA-LUX
Voltage	Max. 240V
Tilt	10°
Rotation	360°
Cut Out	82MM - Circular
IP Rating	IP20
Material	Aluminium
Finish	Epoxy Powder Coat; Metallic Finishes - Electroplate

Finishes



WHITE (RAL 9016)



ALL WHITE (RAL 9016)