




NEMO-F - Fire Rated IP65 Downlight



Description

IP65 NEMO-F Fixture featuring die-cast Aluminium construction with double-tempered safety glass. Fire certification rated to 90 minutes. Product incorporates a simple clip lamp change mechanism with removable fascia for ease of maintenance. **Images shown are for visual reference. Light source not included.**

Dimensions

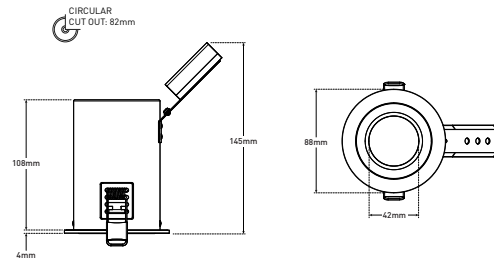

Specification

Suggested Light Source	DYNA, DYNA-LUX
Voltage	Max. 240V
Tilt	Fixed
Rotation	Fixed
Cut Out	82MM - Circular
IP Rating	IP65
Accessories	GU10 Lamp Holder
Material	Aluminium
Finish	Epoxy Powder Coat; Metallic Finishes - Electroplate

Finishes



WHITE (RAL 9016)



CHROME



SATIN CHROME