





TERRA-FL - 24W Surface Mounted Floodlight

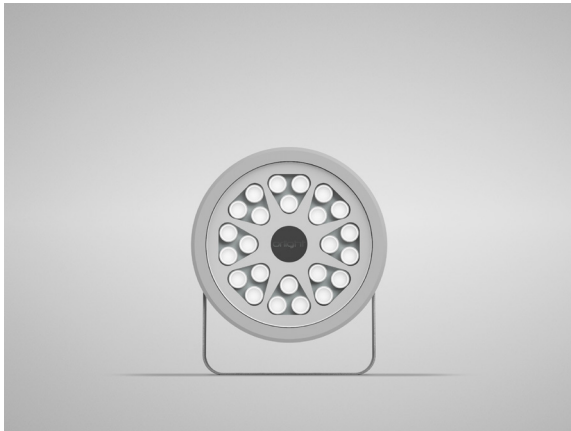


Description

Surface mounted floodlight fixture constructed from Aluminium and rated to IP67 allowing for submersion in water thus negating common issues arising from lack of soil drainage. Configured to 30 degree beam as standard. Suitable for the illumination of small/medium trees, building exteriors, columns. **Driver inclusive with product purchase.**

Dimensions

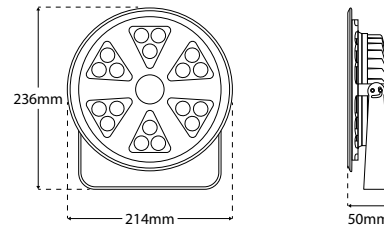

Photometrics

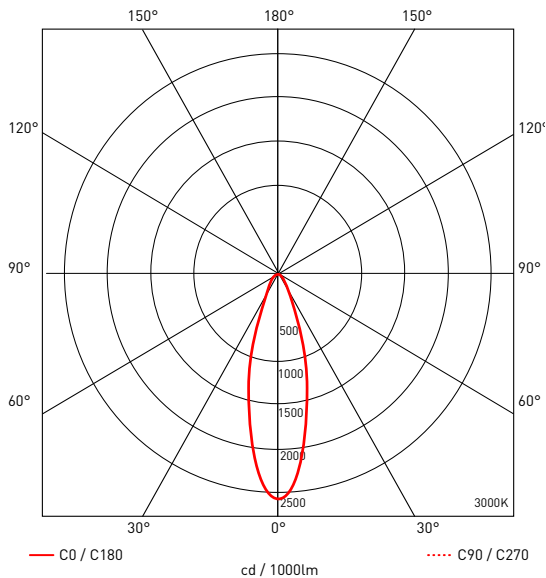

Specification

Power	24W	
Voltage	70VDC	
Colour Temperature	3000K	6000K
Lumens	2015 Lm	2830 Lm
Lumens Per Watt	84 Lm/W	118 Lm/W
CRI	>80	>70
Beam Angle	30°	
Dimming Options	Switched	
Chipset	CREE XPE	
Chip Life	L70 > 60,500 Hours	
Binning	4-Step MacAdams Ellipse	
Ambient Temperature	-20°C ~ 50°C	
IP Rating	IP67	
IK Rating	IK10	
Weight	1700g	
Material	Aluminium	
Finish	Aluminium	

Colourmetrics



3000K

R1	R2	R3	R4	R5	R6	R7	R8
79	85	92	82	78	81	86	61
R9	R10	R11	R12	R13	R14	R15	
6	66	81	61	80	95	70	

6000K

R1	R2	R3	R4	R5	R6	R7	R8
68	72	76	72	69	64	78	59
R9	R10	R11	R12	R13	R14	R15	
0	35	70	43	67	88	61	